

ThermoPro TP-63B

INDOOR OUTDOOR Temperature and Humidity Monitor




Equipped with a professional grade indoor/outdoor sensors, the ThermoPro TP63 digital indoor outdoor thermometer monitors environmental conditions in 4 locations inside and outside your home from 200ft/60m away. The bold, easy to read LCD screen displays accurate, reliable indoor outdoor temperature and indoor humidity with high / low information for the past 12 hours and over all-time. The outdoor sensor features powerful wireless technology, a weather-resistant & rechargeable design and an integrated hanger for easy mounting.

Specifications

- ✓ Indoor Temperature Range: $-4\sim 158^{\circ}\text{F}$ ($-20\sim 70^{\circ}\text{C}$);
- ✓ Outdoor Temperature Range: $-31\sim 158^{\circ}\text{F}$ ($-35\sim 70^{\circ}\text{C}$).
- ✓ Temperature Tolerance: $\pm 2.0^{\circ}\text{F}$ ($\pm 1.1^{\circ}\text{C}$).
- ✓ Humidity Range: 10~99%.
- ✓ Humidity Tolerance: $\pm 2\%$ from 30% to 80%; $\pm 3\%$ below 30% and above 80%.
- ✓ Wireless indoor outdoor thermometer hygrometer transmits readings up to 200ft/60m using a 433MHz strong signal.
- ✓ Rechargeable lithium battery technology resists cold weather as low as -31°F (-35°C), assuring transmission in any harsh environment.

Features:

- LCD screen with large digits displays the current indoor-outdoor temperature and humidity percentages.
- Wireless indoor outdoor thermometer hygrometer transmits readings up to 200ft/60m using a 433MHz strong signal.
- Rechargeable lithium battery technology resists cold weather as low as -31°F (-35°C), assuring transmission in any harsh environment.
- Completely sealed outdoor sensor for reliable use in rain or snow.
- Sync up to 3 outdoor remote sensors to monitor different locations (additional 2 sensors sold separately).
- Indoor Temperature Range: $-4\sim 158^{\circ}\text{F}$ ($-20\sim 70^{\circ}\text{C}$); Outdoor Temperature Range: $-31\sim 158^{\circ}\text{F}$ ($-35\sim 70^{\circ}\text{C}$).
- Temperature Tolerance: $\pm 2.0^{\circ}\text{F}$ ($\pm 1.1^{\circ}\text{C}$).
- Humidity Range: 10~99%.
- Humidity Tolerance: $\pm 2\%$ from 30% to 80%; $\pm 3\%$ below 30% and above 80%.

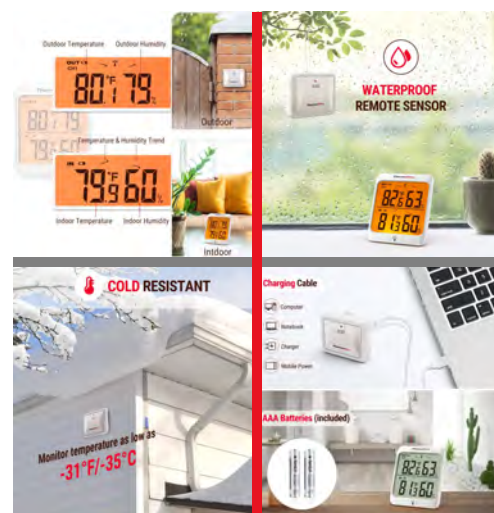

Package Contents:

- 1 x Transmitter
- 1 x Receiver
- 1 x Charging Cable
- 1 x Manual
- 2 x AAA Batteries